


MIXING

- Bottom and helix made of wear resistant STEEL 450HBW
- Rounded fixed safety grill complete with bag breaker
- Electric valve, hydraulic hoses + electric connection kit
- Coupling to the machine



MIXER BUCKET WITH CENTRAL DISCHARGE

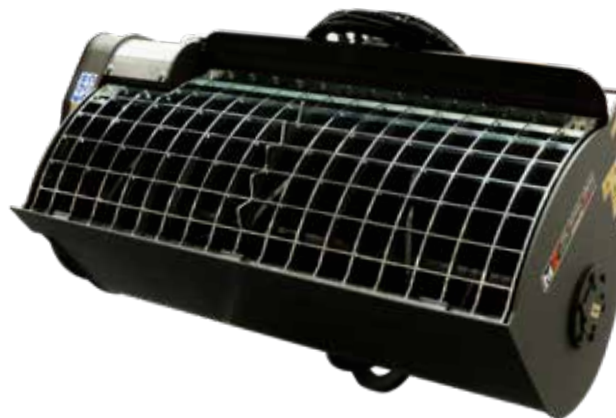

Welded helix made of wear steel 450HBW

Unloading pipe 1500mm length

Sintered steel seal group

Suitable for any type of earth moving machine:

Skid loader _____ 150/200/250/350/450

Backhoe loaders-Compact wheel loaders _____ BM450/600/700

Wheel loaders _____ BM1100/1500/2000

Telehandlers _____ 2/2,5 t BM350/450

3/4 t BM600

>4,5 t BM700

Excavators _____ starting from 3,5 t

MIXER BUCKET WITH SIDE DISCHARGE



- Bolted helix made of wear steel 450HBW
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm)
- Bolted bracket as standard supply, starting from class 3 models
- Polyurethane seal group

Suitable for any type of earth moving machine:

- Skid loader _____ BM100/150/200/250/330/400SL
- Backhoe loaders-Compact wheel loaders _____ BM400/500/600SL
- Wheel loaders _____ BM700/1100SL
- Telehandlers _____ 2/2,5 t BM250/330/400SL
 _____ 3/4 t BM500/600SL
 _____ >4,5 t BM700SL
- Excavators _____ starting from 3,5 t


TWIN DOOR MIXER BUCKET



- Bolted helix made of wear steel 450HBW
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm) and side chute
- Bolted bracket as standard supply, starting from class 3 models
- Polyurethane seal group

Suitable for any type of earth moving machine:

- Skid loader _____ BM150/200/250/330/400TD
- Backhoe loaders-Compact wheel loaders _____ BM400/500/600TD
- Wheel loaders _____ BM700/1100TD
- Telehandlers _____ 2/2,5 t BM250/330/400TD
 _____ 3/4 t BM500/600TD
 _____ >4,5 t BM700TD
- Excavators _____ starting from 3,5 t

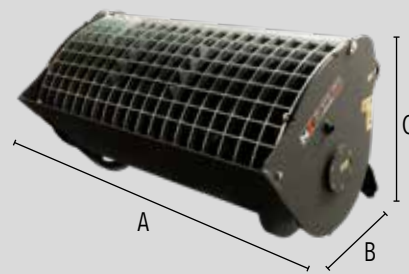

DIMENSIONS

		BM 100 SL*	BM 150 SL	BM 200 SL	BM 250 SL	BM 330 SL	BM 400 SL	BM 500 SL	BM 600 SL	BM 700 SL	BM 1100 SL
A	Width	1180	1285	1490	1495	1605	1715	1795	1940	2090	2160
B	Depth	700	660	660	860	860	860	1075	1075	1075	1305
C	Height	560	645	645	800	800	800	1033	1033	1033	1250

The concrete mixer bucket M3 model SL is equipped with: safety rounded grill with bag splitter - BOTTOM and bolted HELIX made of wear steel 450 HBW - hydraulic motor fully protected - chain tensioner - electric valve with hydraulic hoses - electrical connection kit - hydraulic hoses - flat face couplings (only for SSL) - hydraulic opening of the bottom through a cylinder with covered rod - unloading pipe L=1500 mm.- coupling to the machine (standard bolted bracket, starting from the model BM 500 SL).

By matching the mixing bucket to compact loaders, please consider the following: the operating load of the machine \geq the full load weight of the mixer bucket.

OPTIONALS

	Hydraulic opening of the safety grill including the safety valve.	Protection grid with manual opening, gas springs and safety sensor.
Bolted bracket	Electric spring winder	Excavator bracket - direct coupling
8 / 14 pins connector	Side chute	





MODEL	BM 100 SL*	BM 150 SL	BM 200 SL	BM 250 SL	BM 330 SL	BM 400 SL	BM 500 SL	BM 600 SL	BM 700 SL	BM 1100 SL
Class	-	1	1	2	2	2	3	3	3	4
Capacity [L]	100	150	200	250	330	400	500	600	700	1100
Transmission	gear unit	chain	chain	chain	chain	chain	chain	chain	chain	chain
Empty weight [kg]	205	290	315	415	435	460	695	715	765	1030
Full load weight [kg]	445	650	795	1015	1227	1418	1895	2155	2445	3670
Min/max flow rate [L/min]	25/70	30/60	30/60	40/75	35/75	35/75	70/150	70/150	70/150	100/115
Max pression cont/peak [bar]	140/225	175/225	175/225	175/225	210/300	210/300	150/310	150/310	150/310	205/330

* bucket with manual side discharge, without unloading pipe and electro valve

