

# MIXING

- Bottom and helix made of wear resistant STEEL 400/450 HBW
- Rounded fixed safety grill complete with bag breaker
- Electric valve, hydraulic hoses + electric connection kit
- Coupling to the machine



## MIXER BUCKET WITH CENTRAL DISCHARGE



- Welded helix made of wear STEEL 400/450 HBW
- Unloading pipe 1500mm length
- Sintered steel seal group

### Suitable for any type of earth moving machine:

Skid loader	_____	BM150/200/250/350/450
Backhoe loaders-Compact wheel loaders	_____	BM450/600/700
Wheel loaders	_____	BM1100/1500/2000
Telehandlers	_____	2/2,5 t BM350/450 3/4 t BM600 >4,5 t BM700
Excavators	_____	starting from 5 t

## MIXER BUCKET WITH SIDE DISCHARGE



- Bolted helix made of wear STEEL 400/450 HBW
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm)
- Bolted bracket as standard supply, starting from class 3 models
- Polyurethane seal group

### Suitable for any type of earth moving machine:

Skid loader \_\_\_\_\_ BM100/150/200/250/330/400SL

Backhoe loaders-Compact wheel loaders \_\_\_\_\_ BM400/500/600SL

Wheel loaders \_\_\_\_\_ BM700/1100SL

Telehandlers \_\_\_\_\_ 2/2,5 t BM250/330/400SL

3/4 t BM500/600SL

>4,5 t BM700SL

Excavators \_\_\_\_\_ starting from 3 t

## TWIN DOOR MIXER BUCKET



- Bolted helix made of wear STEEL 400/450 HBW
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm) and side chute
- Bolted bracket as standard supply, starting from class 3 models
- Polyurethane seal group

### Suitable for any type of earth moving machine:

Skid loader \_\_\_\_\_ BM150/200/250/330/400TD

Backhoe loaders-Compact wheel loaders \_\_\_\_\_ BM400/500/600TD


Wheel loaders \_\_\_\_\_ BM700/1100TD

Telehandlers \_\_\_\_\_ 2/2,5 t BM250/330/400TD

3/4 t BM500/600TD

>4,5 t BM700TD

Excavators \_\_\_\_\_ starting from 5 t

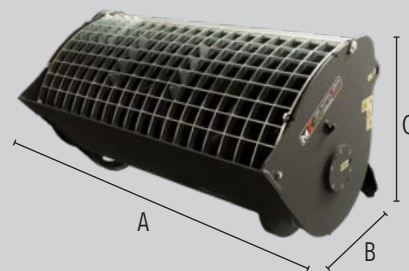

DIMENSIONS

		BM 80 SL**	BM 100 SL*	BM 150 SL	BM 200 SL	BM 250 SL	BM 330 SL	BM 400 SL	BM 500 SL	BM 600 SL	BM 700 SL	BM 1100 SL
A	<b>Width</b>	890	1180	1285	1490	1495	1605	1715	1795	1940	2090	2160
B	<b>Depth</b>	680	700	660	660	860	860	860	1075	1075	1075	1305
C	<b>Height</b>	680	560	645	645	800	800	800	1033	1033	1033	1250

The concrete mixer bucket M3 model SL is equipped with: safety rounded grill with bag splitter - BOTTOM and bolted HELIX made of wear steel 450 HBW - hydraulic motor fully protected - chain tensioner - electric valve with hydraulic hoses - electrical connection kit - hydraulic hoses - flat face couplings (only for SSL) - hydraulic opening of the bottom through a cylinder with covered rod - unloading pipe L=1500 mm.- coupling to the machine (standard bolted bracket, starting from the model BM 500 SL).

By matching the mixing bucket to compact loaders, please consider the following: the operating load of the machine  $\geq$  the full load weight of the mixer bucket.

OPTIONALS

	Hydraulic opening of the safety grill including the safety sensor	Protection grid with manual opening, gas springs and safety sensor
Kit one-way valve with flow reverser (only for the use without electric valve and wiring)	Bolted bracket	Electric spring winder
Excavator bracket	8 / 14 pins connector	Side chute





MODEL	BM 80 SL**	BM 100 SL*	BM 150 SL	BM 200 SL	BM 250 SL	BM 330 SL	BM 400 SL	BM 500 SL	BM 600 SL	BM 700 SL	BM 1100 SL
Class	-	-	1	1	2	2	2	3	3	3	4
Capacity [L]	80	100	150	200	250	330	400	500	600	700	1100
Transmission	chain	gear unit	chain	chain	chain	chain	chain	chain	chain	chain	chain
Empty weight [kg]	185	205	290	315	415	435	460	695	715	765	1030
Full load weight [kg]	377	445	650	795	1015	1227	1418	1895	2155	2445	3670
Min/max flow rate [L/min]	25/70	25/70	30/60	30/60	40/75	35/75	35/75	70/150	70/150	70/150	100/115
Max pression cont/peak [bar]	140/225	140/225	175/225	175/225	175/225	210/300	210/300	150/310	150/310	150/310	205/330

\* bucket with manual side discharge, without unloading pipe and electro valve

\*\* only for mini excavators

