

GROUND SWEEPING

- Collecting bucket
- Polypropylene brush
- Coupling to the machine
- Extremely tough and rugged



SWEeper BUCKET HD



- Direct drive motor
- Brushes made of PPN Ø550 mm
- Double-bevelled blade & reinforcements made of steel HBW450
- It is operated forward & backwards

SWEeper BUCKET F



- PPN brush Ø550 mm
- No. 3 support wheels Ø250x70mm
- Collection bucket with hydraulic opening and closing.
- It is operated only forward
- Floating system for forklift or forks



SWEeper BUCKET D



Ø590 mm polypropylene brush

N. 2 Ø250x50mm support wheels

Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for skid loader, backhoe loader, wheel loader, and forklift up to 7 T; and tractors

SWEeper BUCKET DS



Ø660 mm polypropylene brush

N. 3 Ø250x60mm support wheels

Built-in motor

Mechanical working angle adjustment

Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for wheel loader, backhoe loader and telehandlers from 5 to 12 T, tractors from 100 HP and forklifts from 3,5 T

SWEeper BUCKET C



Ø750 mm polypropylene brush

N. 3 Ø405x110mm support wheels

Built-in motor

Mechanical working angle adjustment


Hydraulic opening and closing of the collection bucket

It is operated only forward

Hooks for: forklift, tractor, earth moving machines

Suitable for wheel loaders and telehandlers starting from 12 T and tractors from 100 HP



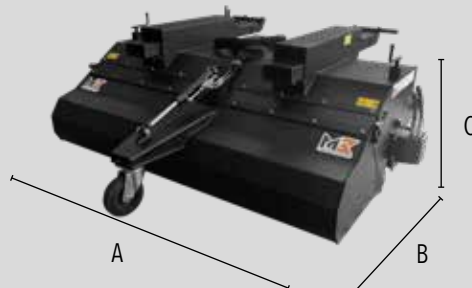

DIMENSIONS

		BS 150 F	BS 180 F	BS 210 F	BS 240 F
A	Width	1760	2060	2360	2660
B	Depth	1900	1900	1900	1900
C	Height	735	735	735	735

- Collection bucket with hydraulic opening and closing
- PPN brush
- N.3 support wheels
- Floating system for forks

The new sweeper bucket M3 F-series is suitable for forklifts and, generally speaking, for all machinery equipped with forks. It can be used in the industrial, agricultural and nursery sectors. It is operated only forward. Thanks to the quick installation, it looks handy and fast for the cleaning of every surface, from big industrial areas to yards, from roads and car parks to farms and riding schools. It is equipped with: collection bucket with hydraulic opening and closing, floating system for forks, three support wheels and PPN brush Ø 550 mm. (Ø 600 mm for BS240F).

OPTIONALS

	Sprinkler kit 100 / 200 L (only for BS240F), with electric pump and hose with nebulizers	Hose kit with nebulizers (for sprinkler kit with tank already installed)
Side brush r/l Ø 600 mm in polypropylene	Nebulizers kit for side brush	Brush shaft with mixed STEEL - PPN rings





MODEL	BS 150 F	BS 180 F	BS 210 F	BS 240 F
Working width [mm]	1500	1800	2000	2400
Weight [kg]	450	500	550	600
Required oil flow [L/min]	30÷45	30÷45	30÷45	30÷45
Flow rate cont/int [L/min]	75÷90	75÷90	75÷90	75÷90
Max pressure cont/int [bar]	230÷295	230÷295	230÷295	230÷295
Ø Brush [mm]	550	550	550	600
Number of rollers [n°]	2x750	1x800 - 1x1000	2x1000	3x750
Collection bucket capacity [L]	190	225	261	320

