


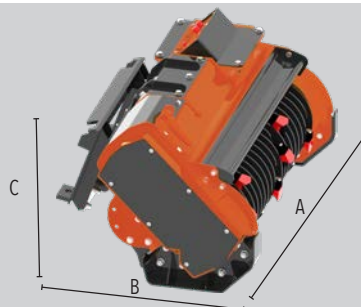

DIMENSIONS

		MH9 MT90	MH9 MT110	MH9 MT90 HD3	MH9 MT110 HD3	MH9 MT90 HD4	MH9 MT110 HD4
A	Width	1050	1240	1050	1240	1050	1240
B	Depth	670	670	670	670	670	670
C	Height	640	640	640	640	640	640

The MH9MT series mulching head, built with a robust and reliable design, can be mounted on excavators, skid steer loaders, and mini track loaders. Thanks to a dedicated kit and by replacing only a few components, it can be used on different types of machines. It is supplied complete with a cast-iron gear motor, valve block including priority valve, shock and anti-cavitation valves, reinforced skid shoes, and mechanically adjustable front and rear hoods for increased cutting capacity. Available in the hammer version, HD3 version with fixed carbide teeth, and HD4 version with fixed teeth and bite limiter.

The third drain line is recommended for back pressures exceeding 5 bar. Rotor rotation speed 2200/2500 rpm.

OPTIONALS

	Floating system	Hydraulic hoses
Mounting hitch (pins not included)	Variable displacement piston motor (manual adjustment)	Hitch for mini track loaders
Hitch for skid loader		

MODEL	MH9 MT90	MH9 MT110	MH9 MT90 HD3	MH9 MT110 HD3	MH9 MT90 HD4	MH9 MT110 HD4
Working width [mm]	900	1100	900	1100	900	1100
Weight [kg]	290	350	380	450	415	490
Oil flow [L/min]	40/50/60	50/60/80/100	50/60/80/100	50/60/80/100	50/60/80/100	50/60/80/100
Pression [bar]	170/220	200/220	200/220	200/220	200/220	200/220
Excavator class [T]	4,0-8,0	6,0-10,0	6,0-12,0	6,0-12,0	6,0-12,0	6,0-12,0
Rotor standard	MHF3	MHF3	MHF14	MHF14	MHF22	MHF22
Rotor optional	MKF3	MKF3	MHF15	MHF15	*****	*****
Motor type	gears	gears	gears	cast iron gear motor*	cast iron gear motor*	piston motor
No. teeth [n°]	14	16	24	30	18	22

* highly recommended piston motor for 12-ton excavators